




50FT DIESEL BOOM LIFT ARTICULATED

Specifications

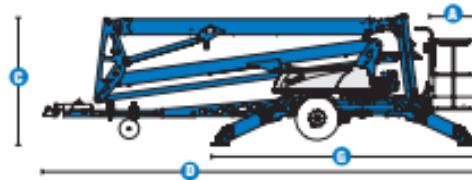

MODEL	TZ™-50	
MEASUREMENTS	Metric	US
Working height*	17.09m	55 ft 6 in
Platform height	15.09m	49 ft 6 in
Entry height	0.51 m	1 ft 8 in
Horizontal reach	8.89m	29 ft 2 in
Clear outreach	7.04m	23 ft 1 in
Up and over clearance	6.71 m	22 ft
A Platform length	0.68m	2 ft 2.8 in
B Platform width	1.12m	3 ft 8 in
C Height - stowed	2.00m	6 ft 10 in
D Length - stowed	7.16m	23 ft 6 in
E Width - stowed	1.68m	5 ft 6 in
F Ground clearance - centre	0.25m	10 in
G Length - outrigger footprint	4.37m	14 ft 4 in
H Width - outrigger footprint	4.37m	14 ft 4 in

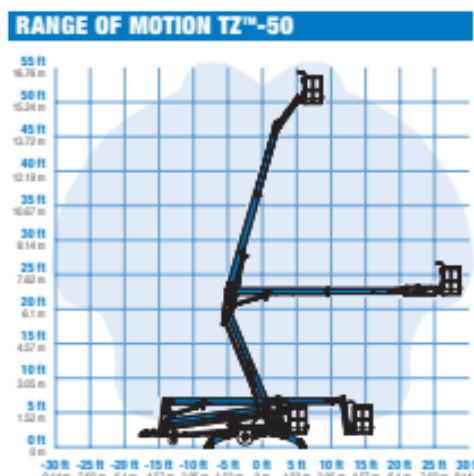

PRODUCTIVITY		
Lift capacity - standard	200 kg	440 lbs
Lift capacity - rotating platform	200 kg	440 lbs
Jib boom	1.25m	4 ft 1 in
Jib working range	135°	135°
Self leveling platform	2.5° standard	
Platform rotation option	160° hydraulic	
AC power to platform	standard	
Turntable rotation	359° non-continuous	
Outrigger leveling capability	10°	10°
Drive speed	1.37 km/h	0.85 mph
Gradeability**	20%	20%
Towing speed rate	97 km/h	60 mph
Tongue weight	100 kg	220 lbs
Surge and parking brakes	standard	
Controls	variable speed system	
Tyres	ST 225/75 R15	
Coupler	5.08 cm (2 in) hitch coupler standard	

POWER		
Power source - standard	24V DC (four 6V 225 Ah batteries)	
Power source - option	Hybrid DC/Gas Honda 4.1 kW (5.5 hp)	
Fuel tank capacity	3.6L	0.95 gal
Hydraulic tank capacity	18L	4.75 gal
Hydraulic system capacity	30L	8.0 gal

WEIGHT***		
Australia - drive opt	2,200 kg	4,850 lbs
- without drive opt	2,040 kg	4,497 lbs

STANDARDS COMPLIANCE ANSI A92.2, CSA C225, CE Compliance, AS 1418.10

* The metric equivalent of working height adds 2m to platform height. U.S. adds 6 ft to platform height.
 ** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 *** Weight will vary depending on options and/or country standards.