
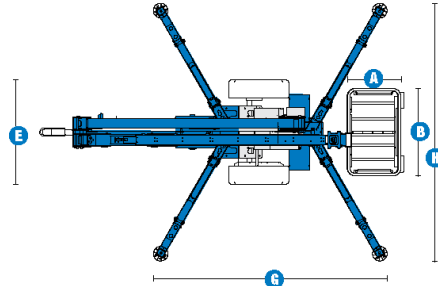


## TZ34/20 BOOM LIFT

### 34FT DIESEL BOOM LIFT ARTICULATED

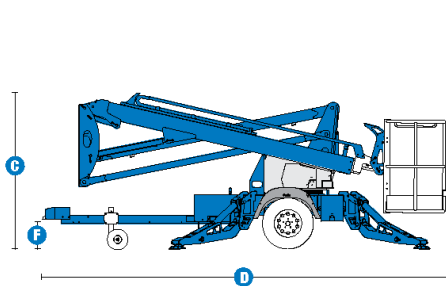

| MODEL                          | TZ™-34/20 |              |
|--------------------------------|-----------|--------------|
| MEASUREMENTS                   | Metric    | US           |
| Working height*                | 12.36 m   | 40 ft        |
| Platform height                | 10.36 m   | 34 ft        |
| Entry height - extended        | 0.16 m    | 6.4 in       |
| Horizontal reach               | 5.59 m    | 18 ft 4 in   |
| Clear out reach                | 4.09 m    | 13 ft 5 in   |
| Up and over clearance          | 4.90 m    | 16 ft 1 in   |
| A Platform length              | 0.68 m    | 2 ft 2.8 in  |
| B Platform width               | 1.12 m    | 3 ft 8 in    |
| C Height - stowed              | 1.94 m    | 6 ft 4.5 in  |
| D Length - stowed              | 5.50 m    | 18 ft 0.5 in |
| E Width - stowed               | 1.45 m    | 4 ft 9.1 in  |
| F Ground clearance             | 0.24 m    | 9.5 in       |
| G Length - outrigger footprint | 3.26 m    | 10 ft 8.4 in |
| H Width - outrigger footprint  | 3.59 m    | 11 ft 9.4 in |

| PRODUCTIVITY                      |                                      |         |
|-----------------------------------|--------------------------------------|---------|
| Lift capacity - standard          | 200 kg                               | 440 lbs |
| Lift capacity - rotating platform | 181 kg                               | 400 lbs |
| Self leveling platform            | standard                             |         |
| Platform rotation option          | 90° mechanical                       |         |
| AC power to platform              | standard                             |         |
| Turntable rotation                | 359° non-continuous                  |         |
| Outrigger leveling capability     | 11°                                  | 11°     |
| Towing speed rate                 | 97 km/h                              | 60 mph  |
| Tongue weight                     | 74 kg                                | 163 lbs |
| Surge and parking brakes          | standard                             |         |
| Controls                          | variable speed system                |         |
| Tyre size                         | ST 205/75 R15                        |         |
| Coupler                           | 5.08 cm (2in) hitch coupler standard |         |

| POWER                     |                                  |          |
|---------------------------|----------------------------------|----------|
| Power source              | 24V DC (four 6V 225Ah batteries) |          |
| Hydraulic tank capacity   | 14.57 L                          | 3.85 gal |
| Hydraulic system capacity | 17 L                             | 4.5 gal  |

| WEIGHT** |          |           |
|----------|----------|-----------|
|          | 1,450 kg | 3,197 lbs |

**STANDARDS COMPLIANCE** ANSI A92.2, CSA C225, CE Compliance, AS 1418.10

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* Weight will vary depending on options and/or country standards.

#### RANGE OF MOTION TZ™-34/20

