GP56K-ECO LIGHTING TOWER

56K LUMEN SOLAR LIGHTING TOWER TRAILER MOUNTED



Globe Power's GP56K Eco Solar Lighting Tower has been built to suit various industries and is compliant with both metropolitan and mining specifications.

- 7 day timer
- Day/night modes
- Folding drawbar
- Solar tilt
- Fire extinguisher
- Emergency stop
- Isolators
- AC charger
- Wheel chocks
- Tie down points
- Lifting points
- Mudguards



USER-FRIENDLY OPERATION INTERFACE

SOLAR


PORTABLE & EASY TO TRANSPORT

AUSTRALIAN DESIGNED & ENGINEERED

PRODUCT SPECIFICATIONS

GENERAL

Model	GP56k - Eco
Lumen Output	56,000
Mast Height	7.5 metres
Mast Type	Hydraulic/Cable
Lights	4 x 120w LED Modules (Dimmable)
Coverage	8,000m² at 5 lux

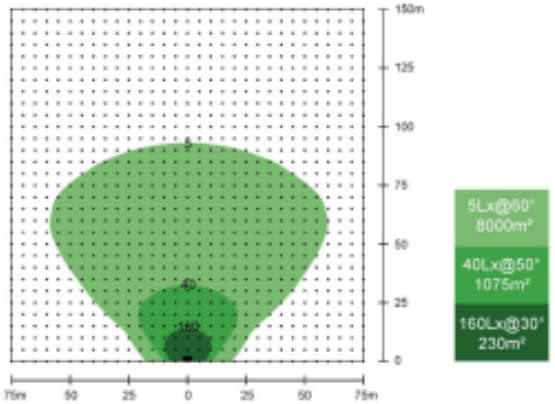

OPERATIONAL DATA

Wind Rating	100km/h
Working Temperature	0 to 50°C
Light Bar Tilt	0 to 90° Electric
Light Bar Rotation	355° Electric
Stabiliser Supports	4 x Manual

BATTERY

Battery	10.8kWh Deep Cycle Gel
Run Time	30 hours
Solar	1.23kWp
Solar Tilt	30° to 45°
Solar Efficiency	1 hour of sun/3 hours of light

UNIT INFORMATION

Dimensions (Transport)	3140 x 1500 x 2900 (LxWxH)
Dimensions (Deployed)	2200 x 3455 x 7650 (LxWxH)
Dimensions (Stowed)	2200 x 1500 x 2900 (LxWxH)
Weight	1,450kg
Security	Wheel/hitch locks, security wheel nuts

GP56K-ECO-V4-1125

Disclaimer: Specifications are indicative only and may vary between model years or individual units. For equipment hire, we will supply the same or an equivalent model that is fit for the disclosed purpose.