

660SJ BOOM LIFT

66FT DIESEL BOOM LIFT TELESCOPIC

Performance

Platform Height	20.02 m
Working Height	22.02 m
Horizontal Outreach	17.40 m
Swing (continuous)	360°
Platform Capacity	340 kg Restricted 250 kg Unrestricted
Platform Size	0.91 x 2.44 m
Platform Rotator (hydraulic)	180°
Jib	1.83 m
Jib Range of Articulation	130° (+70/-60)
Weight	12,500 kg
Drive Speed	6.3 km/h
Gradeability	45%
Turning Radius	
Outside	3.76 m
Inside	1.27 m

Standard Specifications

Power Source

Diesel Engine	Deutz D20TIL04 Tier 4i
Fuel Tank Capacity	117 L

Hydraulic System

Capacity	129 L
Auxiliary Power	12V-DC

Tyres

Standard	Foam Filled, Non-marking
----------	--------------------------



Accessories & Options

- 0.91 x 1.83 m Platform
- 1/2-in. Air Line to Platform
- Light Package
- Platform Worklights
- Special Hydraulic Oils (consult factory)
- Mesh to Mid Rail
- Accessory Packages
 - SkyGlazier® Package
 - Nite Bright® Package
 - Pipe Rack

Note: Some options may increase lead time, and some option combinations may not be available.

Standard Features

- SkyGuard®
- 4-wheel Drive
- 4-wheel Steer
- 180° Hydraulic Platform Rotator
- Platform Console Machine Status Light Panel*
- AC Generator, Including AC Outlets to Platform
- 5° Tilt Alarm/Indicator Light
- Swing-out Engine Tray
- 12V-DC Auxiliary Power
- Hourmeter
- Improved Multi-function Controls
- Proportional Controls
- Interactive Display at Ground Controls
- Control ADE® System
- Lifting/Tie Down Lugs
- Horn
- 4-wheel Hydrostatic Drive
- Oscillating Axle
- Operator Tool Tray
- Inward Self-closing Swing Gate
- Engine Distress Warning/Shutdown – Selectable via JLG® Analyzer
- Flashing Amber Beacon
- Motion Alarm
- Gull Wing Hoods



*Provides indicator lights at platform control console for system distress, low fuel level, 5° tilt light and foot switch status.

660SJ BOOM LIFT

66FT DIESEL BOOM LIFT TELESCOPIC

Dimensions

All dimensions are approximate.

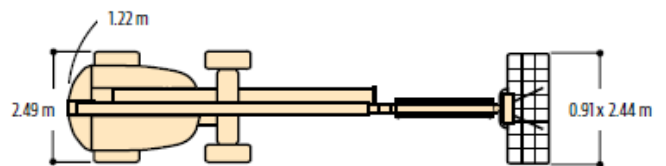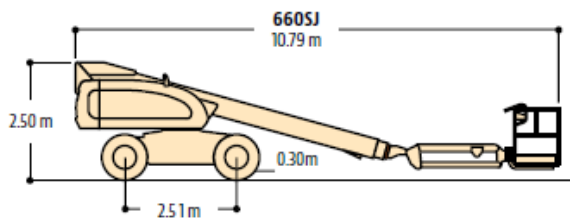

Reach Dimensions

660SJ

