660SJ BOOM LIFT

66FT DIESEL BOOM LIFT TELESCOPIC

Performance

Platform Height	20.02 m
Working Height	22.02 m
Horizontal Outreach	17.40 m
Swing (continuous)	360°
Platform Capacity	340 kg Restricted
	250 kg Unrestricted
Platform Size	0.91 x 2.44 m
Platform Rotator (hydraulic)	180°
Jib	1.83 m
Jib Range of Articulation	130° (+70/-60)
Weight	12,500 kg
Drive Speed	6.3 km/h
Gradeability	45%
Turning Radius	
Outside	3.76 m
Inside	1.27 m



Standard Specifications

Power Source

Diesel Engine	Deutz D2011L04 Tier 4i
Fuel Tank Capacity	117 L

Hydraulic System

Capacity	129 L
Auxiliary Power	12V-DC

Tyres

Standard	Foam Filled, Non-marking

Accessories & Options

- 0.91 x 1.83 m Platform
- 1/2-in. Air Line to Platform
- Light Package
- Platform Worklights
- Special Hydraulic Oils (consult factory)
- Mesh to Mid Rail
- Accessory Packages
  - SkyGlazier® Package
  - Nite Bright® Package
  - Pipe Rack

Note: Some options may increase lead time, and some option combinations may not be available.

Standard Features

- SkyGuard®
- 4-wheel Drive
- 4-wheel Steer
- 180° Hydraulic Platform Rotator
- Platform Console Machine Status Light Panel*
- AC Generator, Including AC Outlets to Platform
- 5° Tilt Alarm/Indicator Light
- Swing-out Engine Tray
- 12V-DC Auxiliary Power
- Hourmeter
- Improved Multi-function Controls
- Proportional Controls
- Interactive Display at Ground Controls
- Control ADE® System
- Lifting/Tie Down Lugs
- Horn
- 4-wheel Hydrostatic Drive
- Oscillating Axle
- Operator Tool Tray
- Inward Self-closing Swing Gate
- Engine Distress Warning/Shutdown – Selectable via JLG® Analyzer
- Flashing Amber Beacon
- Motion Alarm
- Gull Wing Hoods

*Provides indicator lights at platform control console for system distress, low fuel level, 5° tilt light and foot switch status.


Disclaimer: Specifications are indicative only and may vary between model years or individual units. For equipment hire, we will supply the same or an equivalent model that is fit for the disclosed purpose.


660SJ BOOM LIFT

66FT DIESEL BOOM LIFT TELESCOPIC

Dimensions


All dimensions are approximate.

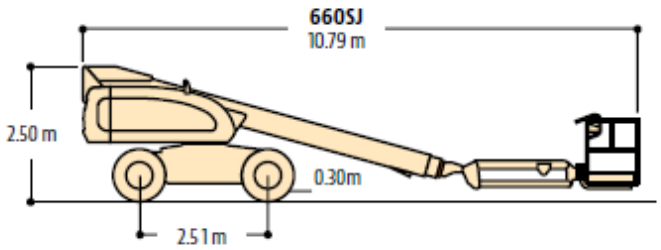

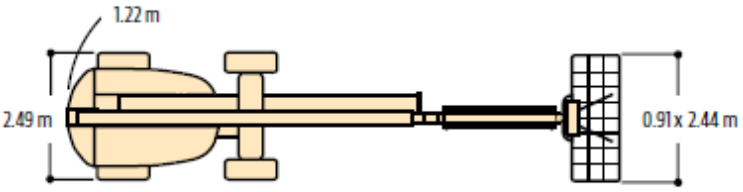

Reach Dimensions

660SJ

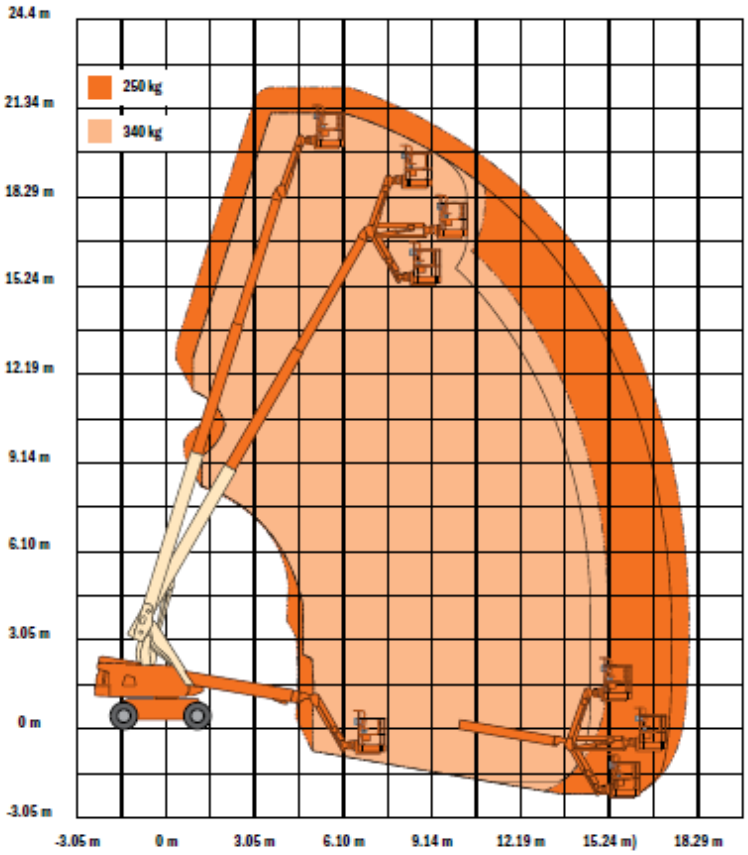

Disclaimer: Specifications are indicative only and may vary between model years or individual units. For equipment hire, we will supply the same or an equivalent model that is fit for the disclosed purpose.