



P2.0UT PALLET JACK

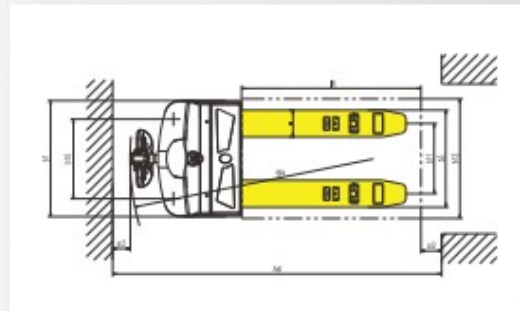

MODEL	MEASUREMENT	P2.0UT
Load capacity/rated load	Q (kg)	2000
Load centre distance	c (mm)	600
Load distance, centre of drive axle to fork	x (mm)	815/865/935
Wheelbase	y (mm)	1280
Fork height, lowered	h13 (mm)	82
Tyre size, front	mm	Φ250x70
Tyre size, rear	mm	Φ82x126 (98)
Additional wheels (dimensions)	mm	Φ127x57
Wheels, number front rear (x=driven wheels)		1x+2/2 (4)
Max. lift height	h3 (mm)	202
Height of tiller in drive position min./max.	h14 (mm)	780/1230
Overall length	l1 (mm)	1655/1705/1775
Length to face of forks	l2 (mm)	555
Overall width	b1 (mm)	775
Fork dimensions	s/a/l (mm)	54x180x1100/1150/1220
Width overall forks	b5 (mm)	550/685
Aisle width for pallets 1000x1200 crossways	As1 (mm)	2015/2065/2135
Aisle width for pallets 800x1200 lengthways	As1 (mm)	2115/2115/2135
Turning radius	Wa (mm)	1400/1450/1520
Drive motor power	kW	1.2
Lift motor power	kW	0.8
Sound level at the driver's ear according to DIN12503	dB (A)	70
Travel speed, laden/unladen	Km/h	5.5/5.6
Battery voltage, nominal capacity K5	V/Ah	24/210
Battery weight	Kg	196
Battery box dimensions	mm	750x170x534
Service weight (with battery)	Kg	640-645

P2.0UT Power Plug Type

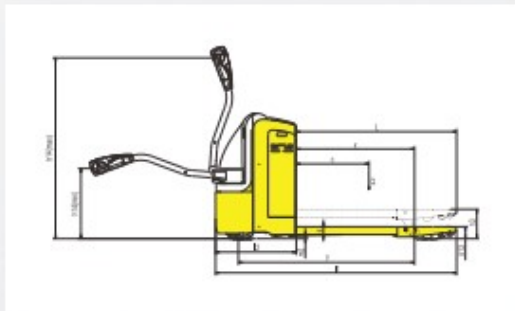