
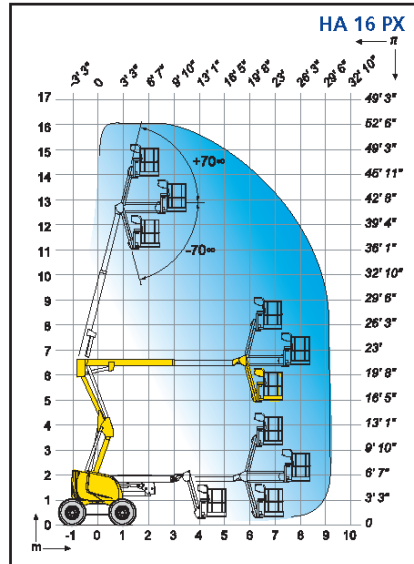


HA18PX BOOM LIFT

50FT DIESEL BOOM LIFT ARTICULATED

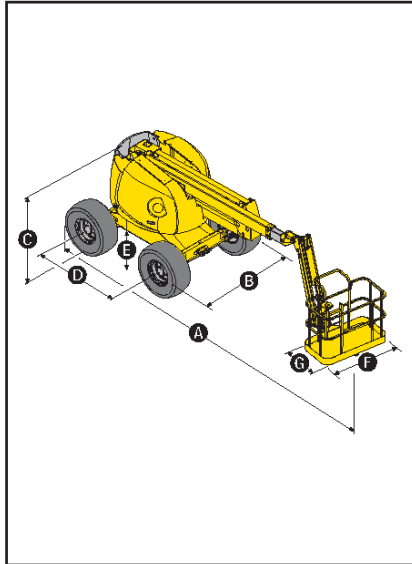

SPECIFICATIONS

	HA 16 PX		HA 18 PX	
Working height	16.0 m	52 ft 6 in	17.3 m	56 ft 9 in
Platform height	14.0 m	45 ft 11 in	15.3 m	50 ft 2 in
Maximum outreach	9.1 m	29 ft 10 in	10.60 m	34 ft 9 in
Up and over clearance	6.60 m / 21 ft 8 in			
Platform capacity	230 kg / 507 lb			
Fly jib range of motion	140° (+70° / -70°)			
Ⓐ Stowed length	7,15 m	23 ft 6 in	7,80 m	25 ft 7 in
Ⓑ Width	2.30 m / 7 ft 7 in			
Ⓒ Stowed height	2.20 m / 7 ft 3 in			
Ⓓ Wheelbase	2.0 m / 6 ft 7 in			
Ⓔ Ground clearance	40 cm / 16 in			
Ⓕ x Ⓖ platform size	1.8 m x 0.8 m / 5 ft 11 in x 2 ft 7 in			
Transport length	5,30 m	17 ft 5 in	5.90 m	19 ft 4 in
Tailswing	0			
Drive speed	0,8 km/h - 5.5 km/h / 0.5 mph - 3.4 mph			
Outside turning radius	3,75 m / 12 ft 4 in			
Inside turning radius	1,75 m / 5 ft 9 in			
Turntable rotation (continuous)	360°			
Hydraulic platform rotation	180°			
Engine	Deutz Diesel 42 cv - 31kW			
Gradeability	50%			
Tyres (foam filled)	385/65-22.5			
Hydraulic tank	100 l / 26 gal			
Fuel tank	72 l / 19 gal			
Weight	7000 kg	15,435 lb	7900 kg	17,420 lb

AS 1418.10