SL2012-E SCISSOR LIFT

65FT ELECTRIC SCISSOR LIFT NARROW ROUGH TERRAIN TRACKED

Size	Metric	British
Max. Working Height Ⓐ	22.00m	72ft 2in
Max. Platform Height Ⓑ	20.00m	65ft 7in
Overall Length Ⓒ	4.72m	15ft 6in
Overall Width Ⓓ	1.25m	4ft 1in
Overall Height(Rails Up) Ⓔ	3.82m	12ft 6in
Overall Height(Rails Down) Ⓕ	2.99m	9ft 10in
Platform Size(Length×Width)	4.30m×1.19m	14ft 1in × 3ft 11in
Platform Extension Size Ⓖ	1.80m	5ft 11in
Ground Clearance(Stowed/Raised)	0.20m/0.02m	8in/1in
Wheelbase Ⓗ	3.18m	10ft 5in
Turning Radius(Inside/Outside)	1.6m/2.3m	5ft 3in/7ft 7in
Tyres	28×10-22	28×10-22

Performance		
S.W.L	750kg	1653lb
S.W.L On Extension	750kg	1653lb
Max. Occupants	2	2
Gradeability	25%	25%
Travel Speed(Stowed)	3.0km/h	3.0km/h
Travel Speed(Raised)	0.5km/h	0.5km/h
Max. Working Slope	1°(0°)	1°(0°)
Up/Down Speed	85/75sec	85/75sec

Weight		
Overall Weight	12350kg	27227lb

Power		
Hydraulic Tank	130L	130L
Battery	48V/630Ah	48V/630Ah
Charger	48V/60A	48V/60A
Driving Motor	4×AC 32V/3.3kW	4×AC 32V/3.3kW
Lifting Motor	2×DC 48V/8.0kW	2×DC 48V/8.0kW

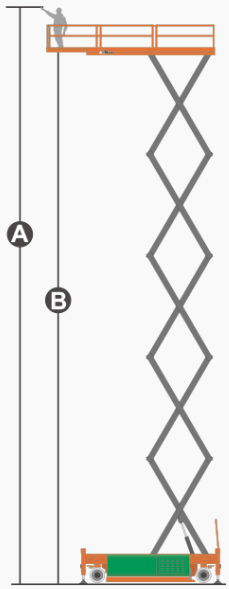

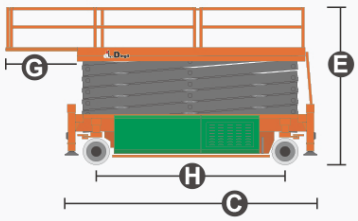

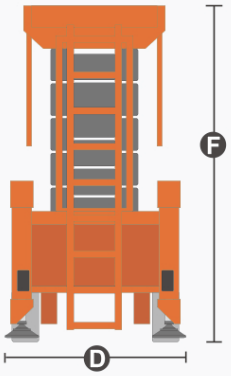

* The platform height plus 2m (7ft in British standard) is the working height.

Standards Compliance

Disclaimer: Specifications are indicative only and may vary between model years or individual units. For equipment hire, we will supply the same or an equivalent model that is fit for the disclosed purpose.