GP10-LT LIGHTING TOWER

665K LUMEN DIESEL LIGHTING TOWER TRAILER MOUNTED

Globe Power's GP10-LT Lighting Tower features 10 highly efficient LED heads and a safe 48V DC voltage for industry leading fuel savings. It is suitable for mining operations, construction projects, events, civil and road works, and is compliant with metropolitan and mining required specifications.

DURABLE & COST EFFECTIVE | BUILT FOR INDUSTRY | AUSTRALIAN DESIGNED

PRODUCT SPECIFICATIONS

GENERAL

Model	GP10-LT
Lumen Output	665,000
Mast Height	9 metres (max)
Mast Type	Hydraulic
Lights	10 x 350W LED (Dimmable)
Hydraulic System Pump	Hydraulic
Function Control	Electric over hydraulic

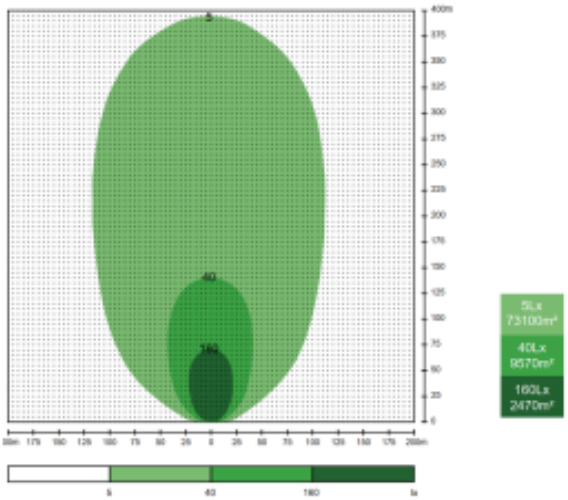



UNIT INFORMATION

Dimensions (Stowed)	3800 x 2330 x 2850 (LxWxH)
Dimensions (Deployed)	3800 x 2830 x 9000 (LxWxH)
Weight	1,950kg
Trailer Wheels	16" x 6 Trac, 4 rims
Tyres	235/R16 x 16"
Towing Speed (Max)	80km/h

GENSET

Generator	Perkins 403D-11G
Fuel Type	Diesel
Fuel Tank Capacity	160L, 110% bunded
Fuel Consumption	1.3L/hr
Running Time	123 hours
Alternator	Sincro FB 4-48/100, 48V DC
Noise Level	68dB at 7m
Control Panel	Electronic genset control module with auto stop/start

OPERATIONAL

Wind Rating	100km/h
Mast Operation	Hydraulic lifting system
Mast Rotation	350° Non-continuous
Mast Horizontal Outreach	3m (max)
Mast Lift / Lower Time	110sec / 90sec
Tilt Telescope	Hydraulic

GP10-LT-V3-0725

Disclaimer: Specifications are indicative only and may vary between model years or individual units. For equipment hire, we will supply the same or an equivalent model that is fit for the disclosed purpose.