


25FT ELECTRIC MAN LIFT VERTICAL MAST PUSH AROUND

Model	AWP-20S		AWP-25S		AWP-30S	
Measurements	Metric	US	Metric	US	Metric	US
Working height*	8.12 m	26ft 1 in	9.57m	30ft 10 in	11m	35ft 6 in
Platform height	6.12 m	20ft 1 in	7.57 m	24ft 10 in	9m	29ft 6 in
 Height - stowed (Standard)	1.98 m	6ft 6 in	1.98m	6ft 6 in	1.98m	6ft 6 in
 Tilted back** (Standard)	-	-	-	-	-	-
 Length - stowed (Standard)	1.24 m	4ft 1 in	1.31 m	4ft 3.5 in	1.35 m	14ft 5 in
 Tilted back***	-	-	-	-	-	-
 Width (Standard)	0.74 m	2ft 5 in	0.74m	2ft 5 in	0.74m	2ft 5 in
Productivity						
Lift capacity	159kg	350lbs	159kg	350lbs	159kg	350lbs
 Outrigger footprint (l/w) (Standard)	1.55 x 1.35 m	5ft 1 in x 4ft 5 in	1.75 x 1.55 m	5ft 9 in x 5ft 1 in	1.93 x 1.73 m	6ft 4 in x 5ft 6 in
 Corner access*** (Standard)	0.38 m	1ft 3 in	0.48m	1ft 7 in	0.56m	1ft 10 in
 Wall access front/side (Standard)	0.15 x 0.33 m	6 in x 1ft 1 in	0.18 x 0.43 m	7 in x 1ft 5 in	0.20 x 0.53 m	8 in x 1ft 9 in
Platform Dimensions: (l/w/h)						
Standard	0.69 x 0.66 x 1.14 m	27 x 26 x 44.75 in	0.69 x 0.66 x 1.14 m	27 x 26 x 44.75 in	0.69 x 0.66 x 1.14 m	27 x 26 x 44.75 in
Power						
Power source - AC or DC models	12V DC / 240/50 Hz AC		12V DC / 240/50 Hz AC		12V DC / 240/50 Hz AC	
Weight***						
AC models (Standard)	307kg	677lbs	330kg	727lbs	352kg	777lbs
DC models (Standard)	347kg	766lbs	371kg	817lbs	393kg	867lbs
Standards Compliance						
ANSI A82.3, CSA B354.1, CE Compliance, AS 1418.10						

Model	AWP-36S		AWP-40S	
Measurements	Metric	US	Metric	US
Working height*	13.10 m	42ft 5in	14.29m	46ft 4in
Platform height	11.10 m	36ft 5in	12.29m	40ft 4in
 Height - stowed (Standard)	2.78 m	9ft 1.5in	2.78m	9ft 1.5in
 Tilted back** (Standard)	1.92 m	6ft 3.5in	1.98m	6ft 6in
 Length - stowed (Standard)	1.40 m	4ft 7in	1.42m	4ft 6in
 Tilted back**	2.97 m	9ft 9in	2.97m	9ft 9in
 Width (Standard)	0.74 m	2ft 5in	0.74m	2ft 5in
Productivity				
Lift capacity	159kg	350lbs	136kg	300lbs
 Outrigger footprint (l/w) (Standard)	2.12 x 1.91 m	6ft 11in x 6ft 3in	2.26 x 2.06m	7ft 5in x 6ft 9in
 Corner access*** (Standard)	0.74 m	2ft 5in	0.79m	2ft 7in
 Wall access front/side (Standard)	0.36 x 0.64 m	1ft 2in x 2ft 1in	0.38 x 0.71m	1ft 3in x 2ft 4in
Platform Dimensions: (l/w/h)				
Standard	0.69 x 0.66 x 1.14 m	27 x 26 x 44.75 in	0.69 x 0.66 x 1.14 m	27 x 26 x 44.75 in
Power				
Power source - AC or DC models	12V DC / 240/50 Hz AC		12V DC / 240/50 Hz AC	
Weight***				
AC models (Standard)	461 kg	1,017 lbs	472 kg	1,040 lbs
DC models (Standard)	502 kg	1,107 lbs	513 kg	1,130 lbs
Standards Compliance				
ANSI A82.3, CSA B354.1, CE Compliance, AS 1418.10				

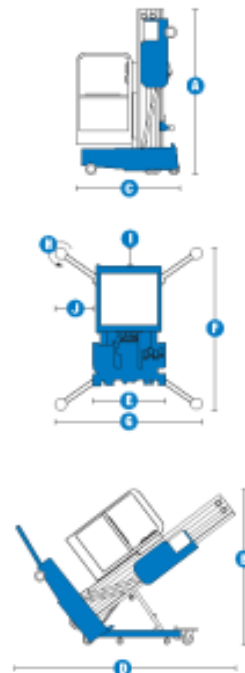

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Tilt back height with standard platform. For tilt back height with other platforms, please contact your sales representative.
 *** Corner of platform top rail to corner of wall with ability to rotate leveling jack handle.