


GS1330M SCISSOR LIFT

13FT ELECTRIC SCISSOR LIFT NARROW

Model	GS™-1330m	
Measurements	**Metric**	**US**
Working height maximum*	5.81 m	18 ft 6 in
A Platform height maximum	3.81 m	12 ft 6 in
B Platform height - stowed	0.90 m	2 ft 11 in
C Platform length - outside	1.26 m	4 ft 2 in
extended	1.72 m	5 ft 8 in
Slide-out platform extension deck	0.46 m	1.5 ft
D Platform width - outside	0.67 m	26.5 in
Guardrail height	1.10 m	3 ft 7 in
Toeboard height	0.15 m	6 in
E Height - stowed, fixed rails	2.02 m	6 ft 7.5 in
Length - stowed	1.41 m	4 ft 8 in
- stowed extended	1.87 m	6 ft 2 in
F Width	0.78 m	30.5 in
Wheelbase	0.98 m	3 ft 3 in
G Ground clearance - centre	6 cm	2.4 in
H - with pothole guards deployed	2 cm	0.83 in
I		
Productivity		
Max platform occupancy (indoor/outdoor)**	2/-	2/-
Lift capacity	227 kg	500 lb
Lift capacity - extension deck	91 kg	200 lb
Drive height	Full height	
Drive speed - stowed	4.0 km/h	2.5 mph
Drive speed - raised	0.8 km/h	0.5 mph
Gradeability - stowed***	25%/14°	25%/14°
Turning radius - inside	40 cm	15.7 in
Turning radius - outside	1.55 m	5 ft 1 in
Raise/lower speed	20 / 22 sec	
Controls	Proportional	
Drive	dual rear wheel, electric	
Brakes	dual rear wheel, electric	
Tyres solid non-marking	25.4 x 7.6 cm	10 x 3 in
Power		
Power source	24 V DC (two 12 V 85 Ah batteries)	
Hydraulic system capacity	1.5 gal	5.6 L
Weight**		
	887 kg	1,953 lb
Standards Compliance	AS 1418.10	

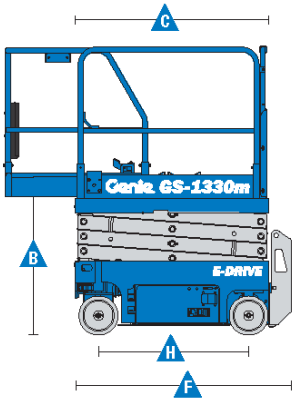

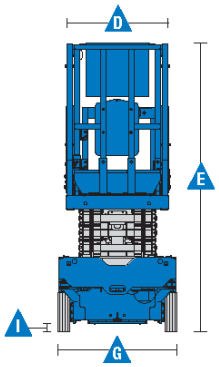

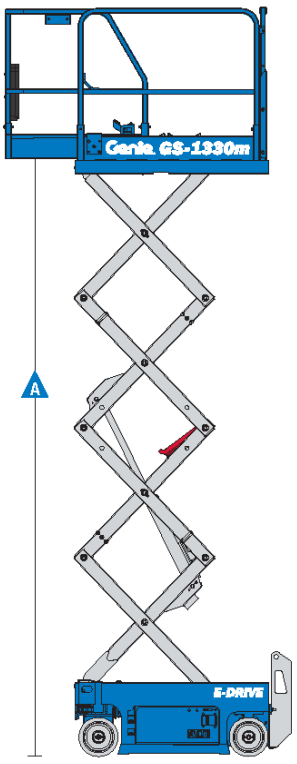

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
** Indoor use only for the GS-1330m
*** Gradeability applies to driving on slopes, see Operator's Manual for details regarding slope ratings.
**** Weight will vary depending on options and/or country standards.

Disclaimer: Specifications are indicative only and may vary between model years or individual units. For equipment hire, we will supply the same or an equivalent model that is fit for the disclosed purpose.