

32FT ELECTRIC SCISSOR LIFT WIDE DECK

Performance

Platform Height-Elevated (Indoor / Outdoor)		
ES1932i	19 ft / NA	5.8 m / NA
ES1932	19 ft / 19 ft	5.8 m / 5.8 m
ES2632	25 ft 5 in. / 21 ft	7.8 m / 6.4 m
ES3246	32 ft / 32 ft	9.8 m / 9.8 m
Platform Capacity (Indoor / Outdoor)		
ES1932i	507 lb / NA	230 kg / NA
ES1932	507 lb / 507 lb	230 kg / 230 kg
ES2632	507 lb / 275 lb	230 kg / 125 kg
ES3246	705 lb / 507 lb	320 kg / 230 kg
Capacity on Platform Extension		
ES1932i / ES1932 / ES2632 / ES3246	265 lb	120 kg
Number of Occupants (Indoor / Outdoor)		
ES1932i	1 / 0	
ES1932 / ES2632 / ES3246	2 / 1	
Lift/Lower Time		
ES1932i / ES1932	22/24 seconds	
ES2632	32/24 seconds	
ES3246	50/38 seconds	
Maximum Drive Height (Indoor)		
ES1932i	Fully Elevated	
Maximum Drive Height (Outdoor)		
ES1932i	N/A	
ES1932	Fully Elevated	
ES2632	21 ft	6.40 m
ES3246	Fully Elevated	
Weight*		
ES1932i	2,762 lb	1,253 kg
ES1932	3,450 lb	1,565 kg
ES2632	4,400 lb	1,996 kg
ES3246	5,620 lb	2,549 kg
Ground Bearing Pressure		
ES1932i	106 psi	75 kg/cm ²
ES1932	110 psi	8.2 kg/cm ²
ES2632	94 psi	6.6 kg/cm ²
ES3246	136 psi	9.6 kg/cm ²
Drive Speed-Elevated		
ES1932i/ES1932	0.5 mph	0.8 km/h
Drive Speed-Lowered		
ES1932i/ES1932	3 mph	4.8 km/h
ES2632	2.75 mph	4.4 km/h
ES3246	3 mph	4.8 km/h
Gradeability		
ES1932i	25%	
Tilt Rating - Side To Side (Indoor / Outdoor)		
ES1932i	2.75 degrees / NA	
ES1932	1.75 degrees / 1.50 degrees	
ES2632	1.50 degrees / 1.50 degrees	
ES3246	2.50 degrees / 1.50 degrees	
Tilt Rating - Fore and Aft		
ES1932i	2.75 degrees	
ES1932	3.75 degrees	
ES2632 / ES3246	3.50 degrees	
Turning Radius (Inside)		
ES1932i/ES1932	0	0
Turning Radius (Outside)		
ES1932i/ES1932	66 in.	1.7 m
ES2632	88 in.	2.2 m
ES3246	93 in.	2.4 m

* Certain options or country standards will increase weight.



Standard Specifications

Power Source

Batteries	4 x 6V 220 amp-hr
Charger	27 amp
Drive	24V DC

Hydraulic Reservoir

Capacity (at Full mark)		
ES1932i/ES1932	1.85 gal.	7 L
ES2632/ES3246	3.2 gal.	12 L
Pump		
Fixed Displacement Gear		

Tires

Tire Size/Type (Non-Marking)		
ES1932i/ES1932	12.7 x 4 in.	329 x 100 mm
ES2632/ES3246	16 x 5 in.	406 x 125 mm

Brakes

- Multi-Disc Friction

Standard Features

- Proportional Controls - Battery Condition Indicator - AC Receptacle in Platform - All Motion Alarm 27 amp Multi-Function Universal Charger - Horn - Hourmeter - Tilt Alarm and Light - Lanyard Attach Points - Movable, Removable Platform Control Box - Nickel Plated Pins - Lubrication Free Scissor Arm Bushings	- Scissor Maintenance Prop - Active Pothole Protection System - Lifting and Tie Down Points - Fork Lift Pockets - Foot-Actuated Deck Extension - Steel Swing-Out Doors - Variable Tilt Visual Zone Indicator - Manual Descent Cable - Diamond Tread Steel Deck - Greaseless Kingpin Joints - Analyzer Port for Diagnostics - Dynamic Braking	- Removable Ladder - QuickFold Rails (ES1932i & ES1932) - Smart Charger - CAN Enabled - USB Charger & Phone Holster - Self-closing Gate - DC Electric Drive - Telematics-Ready Harness - Load Sensing System - Fold Down Rails with Self-Closing Gate - ANSI A92.20 Compliant
--	---	--



Accessories & Options

- CleanGuard - Coiled Platform Control Box Cable - Drive Motor Covers - Flashing Amber Beacon	- MDI (Ground) - Anti-Vandalism PWG - Eagle Performance Charger 900W Inverter - White Noise Alarm	- JLG® Mobile Control - SkySense™ Level I - SkySense™ Level II (ES2632 & ES3246) - QuickAccess Platform (19' only)
--	---	---

32FT ELECTRIC SCISSOR LIFT WIDE DECK

Dimensions

All dimensions are approximate.

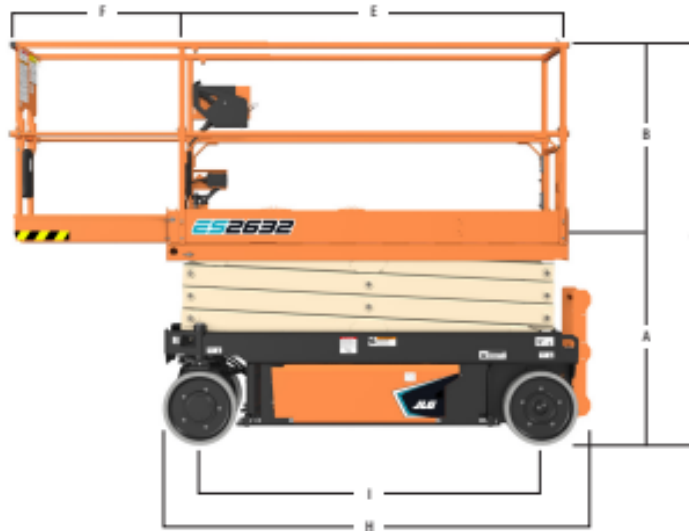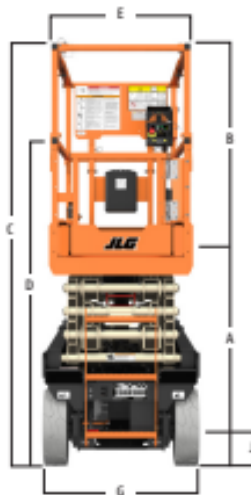

A. Platform Height – Lowered			
ES1932i / ES1932	38.6 in.	1.0 m	
ES2632	43.6 in.	1.1 m	
ES3246	50.9 in.	1.3 m	
B. Platform Railing Height			
ES1932i / ES1932 / ES2632 / ES3246	43.3 in.	1.1 m	
C. Overall Height			
ES1932i / ES1932	82.8 in.	2.1 m	
ES2632	88.2 in.	2.2 m	
ES3246	96.3 in.	2.5 m	
D. Overall Height (Rails Lowered)			
ES1932i / ES1932	64.3 in.	1.63 m	
ES2632	70.3 in.	1.8 m	
ES3246	77.6 in.	2.0 m	
E. Platform Size			
ES1932i / ES1932	62.7 in x 25.4 in.	1.59 m x 64 cm	
ES2632	25.4 in. x 84.0 in.	0.7 m x 2.1 m	
ES3246	41.6 in. x 84.0 in.	1.1 m x 2.1 m	

F. Platform Extension			
ES1932i / ES1932	36.0 in.	91.0 cm	
ES2632	34.0 in.	86.5 cm	
ES3246	36.0 in.	91.0 cm	
G. Overall Width			
ES1932i / ES1932	32.0 in.	81.0 cm	
ES2632	32.0 in.	81.0 cm	
ES3246	46.0 in.	117.0 cm	
H. Overall Length			
ES1932i / ES1932	68.7 in.	1.7 m	
ES2632 / ES3246	94.3 in.	2.4 m	
I. Wheelbase			
ES1932i / ES1932	53.0 in.	1.3 m	
ES2632 / ES3246	74.0 in.	1.9 m	
J. Ground Clearance (Pothole Protection Not Deployed)			
ES1932i / ES1932	2.8 in.	70 cm	
ES2632 / ES3246	3.9 in.	9.8 cm	