


GS1930 SCISSOR LIFT

19FT ELECTRIC SCISSOR LIFT NARROW

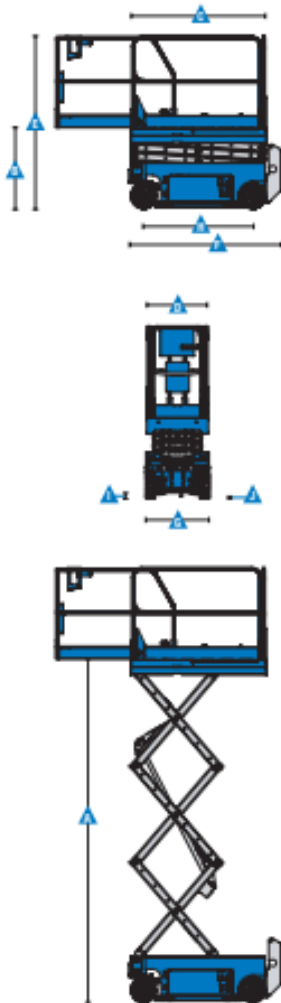

Models	GS-1530		GS-1930	
Measurements	US	Metric	US	Metric
Working height maximum*	21 ft	6.57 m	25 ft	7.79 m
▲ Platform height maximum	15 ft	4.57 m	19 ft	5.79 m
▲ Platform height stowed	3 ft 2.2 in	.97 m	3 ft 3.5 in	1.00 m
▲ Platform length - outside	5 ft 4 in	1.63 m	5 ft 4 in	1.63 m
extended	8 ft 4 in	2.54 m	8 ft 4 in	2.54 m
Slide-out platform extension deck	3 ft	0.91 m	3 ft	0.91 m
▲ Platform width - outside	2 ft 5 in	0.74 m	2 ft 5 in	0.74 m
Guardrail height: fixed rails	3 ft 3 in	0.99 m	3 ft 3 in	0.99 m
fold down (CE)	3 ft 7 in	1.10 m	3 ft 7 in	1.10 m
Toeboard height	6 in	0.15 m	6 in	0.15 m
▲ Height-stowed: fixed rails	6 ft 5 in	1.96 m	6 ft 7 in	2.00 m
folding guardrails (CE)	6 ft 8 in	2.03 m	6 ft 11 in	2.11 m
rails folded	5 ft 8 in	1.73 m	5 ft 9 in	1.75 m
▲ Length-stowed	6 ft	1.83 m	6 ft	1.83 m
Length-stowed extended	9 ft	2.74 m	9 ft	2.74 m
▲ Width	2 ft 6 in	0.76 m	2 ft 6 in	0.76 m
Wheelbase	4 ft 4 in	1.32 m	4 ft 4 in	1.32 m
▲ Ground clearance-center	2.4 in	0.06 m	2.4 in	0.06 m
▲ - with pothole guards deployed	0.75 in	0.02 m	0.75 in	0.02 m

Productivity

Maximum platform occupancy**	2	2	2	2
Lift capacity	600 lbs	272 kg	500 lbs	227 kg
Lift capacity - extension deck	250 lbs	113 kg	250 lbs	113 kg
Drive speed - stowed	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradesability - stowed***	30%		25%	
Turning radius - inside	zero	zero	zero	zero
Turning radius - outside	5 ft 1 in	1.55 m	5 ft 1 in	1.55 m
Raise / lower speed	16 / 29 sec	16 / 29 sec	16 / 25 sec	16 / 25 sec
Controls	proportional		proportional	
Drive	dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel	
Tires - solid non-marking	12 x 4.5 x 8 in	30 x 11 x 20 cm	12 x 4.5 x 8 in	30 x 11 x 20 cm

Power

Power source	24 V DC (four 6 V 225 Ah batteries)	24 V DC (four 6 V 225 Ah batteries)
Hydraulic system capacity	3.75 gal	14.2 L

Weight****

ANSI CSA	2,575 lbs	1,168 kg	2,702 lbs	1,226 kg
CE indoor	2,718 lbs	1,233 kg	3,302 lbs	1,498 kg
AUS indoor	—	—	3,302 lbs	1,498 kg

Standards Compliance

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** CE/AUS markets: GS-1530 and GS-1930 are indoor use only—2 person maximum occupancy.
 GS-1530 and GS-1930 are indoor/outdoor use—1 person maximum.

*** Gradesability applies to driving on slopes, see operator's manual for details regarding slope ratings.

**** Weight will vary depending on options and/or country standards.