


GP43K METRO LIGHTING TOWER


43K LUMEN SOLAR LIGHTING TOWER

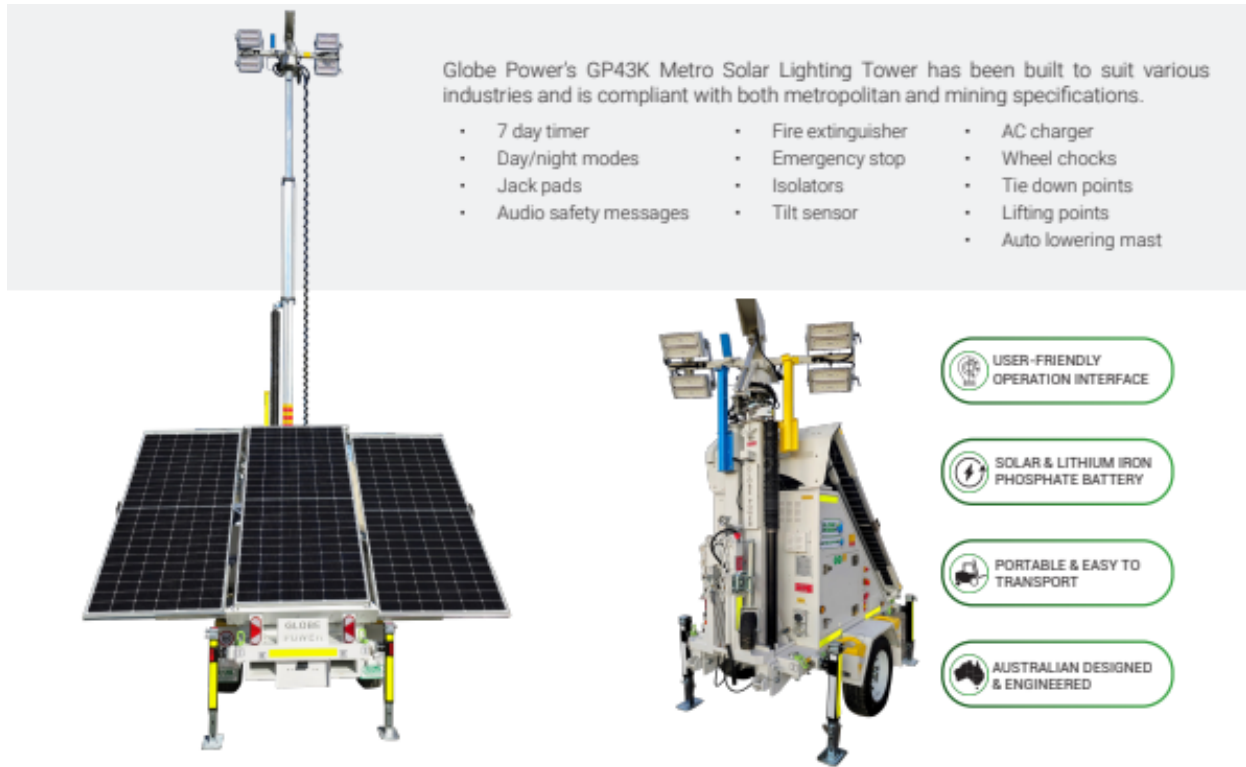

PRODUCT SPECIFICATIONS

GENERAL

Model	GP43K Metro
Lumen Output	46,000
Mast Height	7.5 metres
Mast Type	Hydraulic/Cable
Lights	4 x 100w LED Modules (Dimmable)
Coverage	7,700m ² at 5 lux

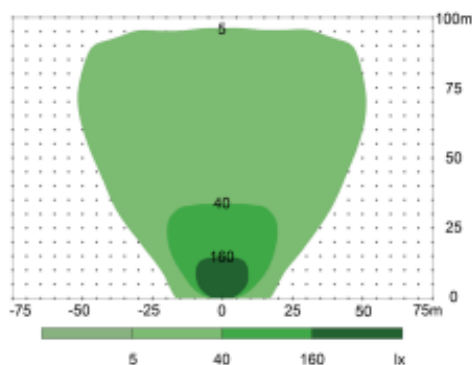

OPERATIONAL DATA

Wind Rating	100km/h
Working Temperature	0 to 50°C
Light Bar Tilt	0 to 90° Electric
Light Bar Rotation	355° Electric
Stabiliser Supports	4 x Manual Rotatable

BATTERY

Battery	10.24kWh Lithium LiFePO4
Run Time	42 hours
Solar	1.35kWp
Solar Tilt	45°
Solar Efficiency	1 hr of sun/4 hrs of light

UNIT INFORMATION

Dimensions (Towing)	3350x 1470 x 2985 (LxWxH)
Dimensions (Stowed)	2260 x 1470 x 2985 (LxWxH)
Dimensions (Deployed)	2260x 3360 x 7970 (LxWxH)
Weight	1,300kg
Security	Wheel/hitch locks, wheel clamp, folding drawbar, security wheel nuts

GP43K Metro V4-0226