GP56K-H ECO HYBRID LIGHTING TOWER

56K LUMEN SOLAR LIGHTING TOWER TRAILER MOUNTED

KEY FEATURES

Globe Power's GP56K Eco Hybrid Solar Lighting Tower has been built to suit various industries and with a Hatz backup engine it can run in any weather.

- 7 day timer
- Day/night modes
- Folding drawbar
- Solar tilt
- Fire extinguisher
- Emergency stop
- Isolators
- AC charger
- Wheel chocks
- Tie down points
- Lifting points
- Mudguards





- USER-FRIENDLY OPERATION INTERFACE
- SOLAR & LITHIUM IRON PHOSPHATE BATTERY
- PORTABLE & EASY TO TRANSPORT
- AUSTRALIAN DESIGNED & ENGINEERED

PRODUCT SPECIFICATIONS

GENERAL

Model	GP56k-H Eco Hybrid
Lumen Output	56,000
Mast Height	7.5 metres
Mast Type	Hydraulic/Cable
Lights	4 x 120w LED Modules (Dimmable)
Coverage	8,000m² at 5 lux

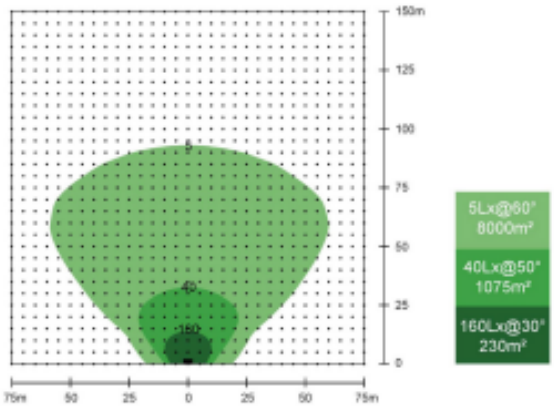

OPERATIONAL DATA

Wind Rating	100km/h
Working Temperature	0 to 50°C
Light Bar Tilt	0 to 90° Electric
Light Bar Rotation	355° Electric
Stabiliser Supports	4 x Manual
Battery	5.1kWh Lithium LiFePO4
Run Time	15 hours from battery
Solar	1.23kWp
Solar Tilt	30° to 45°
Efficiency	1 hour of sun/3 hours of light 1 hour of engine/5 hours of light
Fuel Consumption	0.2L/hr
Fuel Capacity	50L

UNIT INFORMATION

Dimensions (Transport)	3140 x 1500 x 2900 (LxWxH)
Dimensions (Deployed)	2200 x 3455 x 7650 (LxWxH)
Dimensions (Stowed)	2200 x 1500 x 2900 (LxWxH)
Weight	1,450kg
Tyre & Rim Size	215/70R15
Security	Wheel/hitch locks, wheel clamp, security wheel nuts

GP56K-H-Eco-Hybrid-V4-1125

Disclaimer: Specifications are indicative only and may vary between model years or individual units. For equipment hire, we will supply the same or an equivalent model that is fit for the disclosed purpose.