


P34.7 TELEHANDLER

3.4T DIESEL TELEHANDLER INDUSTRIAL

KEY SPECIFICATIONS

Total weight unladen with forks (kg)	6750
Maximum load capacity (kg)	3400
Maximum lift height (m)	6.9
Maximum forward reach (m)	3.45
Lift height at maximum capacity (m)	4.7
Forward reach at maximum load capacity (m)	1.3
Load capacity at maximum height (kg)	1200
Load capacity at maximum forward reach (kg)	1200
Engine (make/number of cylinders)	Deutz/4
Tier 3 engine power (kW/hp)	74.9/102
Fuel capacity (l)	150
Maximum speed (kph)	25
Hydraulic gear pump (bar-l/min)	210/105
Hydraulic oil capacity (l)	105
Electrical circuit (V)	12
Battery (Ah)	100
Cab compliant with ROPS/FOPS standards	✓
4x1 Electro Mechanical joystick controls	✓
Tac-Lock hydraulic attachment coupling	✓
Auxiliary boom hydraulics	✓
Two standard forks (1200mm)	✓
Hydrostatic transmission	✓
Finger touch direction control	✓
Inching pedal for precise control	✓
Permanent 4 wheel drive	✓
Four wheel steering	✓
Dry type disc brakes on all wheels	✓
Automatically locking parking brake	✓
405/70-24 tyres	✓
Rear differential lock	✓
Four cab working lights (2f & 2r)	✓
12V electrical on boom head	✓
Air suspension seat	✓
Front window protection	✓
Full size cab with air conditioning	✓
Stability control system	✓

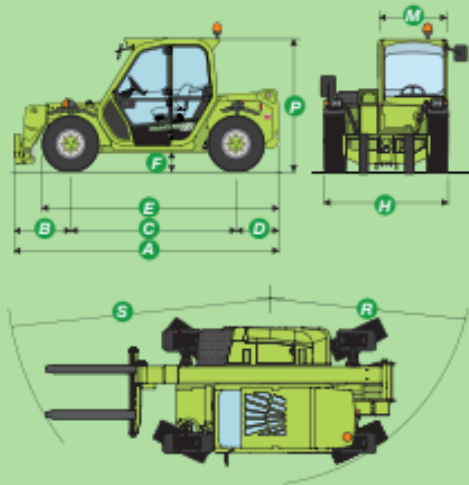

DIMENSIONS

A (mm)	4180
B (mm)	905
C (mm)	2700
D (mm)	570
E (mm)	3865
F (mm)	565
H (mm)	2230
M (mm)	995
P (mm)	2475
R (mm)	3985
S (mm)	4670

P34.7 Load Chart- standard forks

