

TF30.9-115 TELEHANDLER

3.0T DIESEL TELEHANDLER INDUSTRIAL (9.0M)

	PERFORMANCE AND FEATURES	TF30.9-115		
	PERFORMANCE			
	Total unladen weight (kg)	6700		
	Maximum capacity (kg)	3000		
	Lifting height (m)	8,3		
	Maximum reach (m)	5,8		
	Maximum operating height (m)	4,8		
	Maximum operating reach (m)	1,6		
	Capacity at maximum height (kg)	1100		
	Capacity at maximum reach (kg)	550		
	Lateral boom movement (mm)	-		
	Tilting correction (%)	-		
	Boom sections	3		
	POWERTRAIN			
	Turbo motor	Deutz TCD3.6		
	Displacement/cylinders	3600/4		
	Engine Power (kW/HP)	85/115		
	Anti-pollution technology	TIER 4F, STAGE IV, SCR+DOC		
	Reversible fan	●		
	Maximum speed (km/h)	40		
	Fuel tank (l)	85		
	AdBlue tank (l)	12		
	Hydrostatic transmission	● - 2V		
	EPD	Top		
	Axles	Axial		
	Reduction hub	Epicyclic		
	Machine brakes	Dry disc		
	Automatic parking brake	●		
	HYDRAULIC			
	Hydraulic pump	LS+FS		
	Flow rate/pressure (l/min – bar)	125-210		
	Hydraulic tank	85		
	Hydraulic outlet at the top of the boom	●		
	Rear hydraulic outlets	○		
	CAB			
	Cab configuration	ECO		
	MCDC	Compleat		
	FOPS LIV II cab	●		
	ROPS cab	●		
	Cab commands	Electronic joystick		
	Tilting Cab	-		
	Reverse shuttle	Dual reverse		
	CONFIGURATION			
	Cab suspension	-		
	Boom suspension	●		
	Suspension on axles	-		
	Work headlights on cab	●		
	Sun blind	●		
	Tac-lock	●		
	Provision for a platform	○		
	Two floating forks	●		
	Inching-Control	●		
	Four-wheel drive	●		
	Four-wheel steering	●		
	Three steering modes	●		
	Standard tyres	400/70-20"		
	Optional tyres	-		
	Stabilisers	-		
	Turret rotation	-		
	Type approval as an agricultural tractor	○		
	Approval with PNEUMATIC braking	-		
	Approval with HYDRAULIC braking	○		
	PTO	-		
	3-point linkage	-		


- Not Available. ● standard. ○ optional.

TF30.9-115 TELEHANDLER

3.0T DIESEL TELEHANDLER INDUSTRIAL (9.0M)



LOAD CHARTS

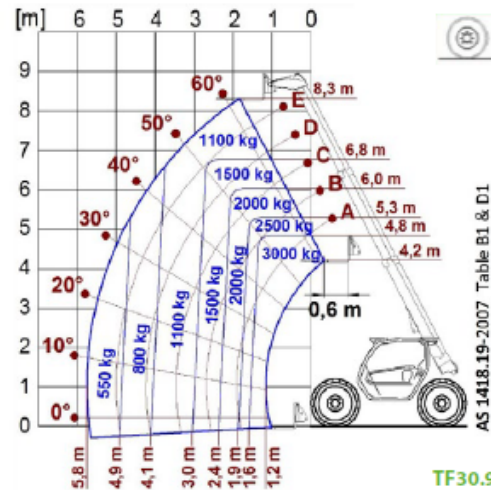

DIMENSIONS

	TF30.9		
A (mm)	4330		
B (mm)	990		
C (mm)	2740		
D (mm)	600		
E (mm)	3910		
F (mm)	340 (300 L)		
H (mm)	2100		
M (mm)	995		
P (mm)	2120 (2020 L)		
R (mm)	3930		
S (mm)	4660		
Z (mm)	850		

