
SPT035-10X6-QLD TRAILER

3.5T PLANT TRAILER

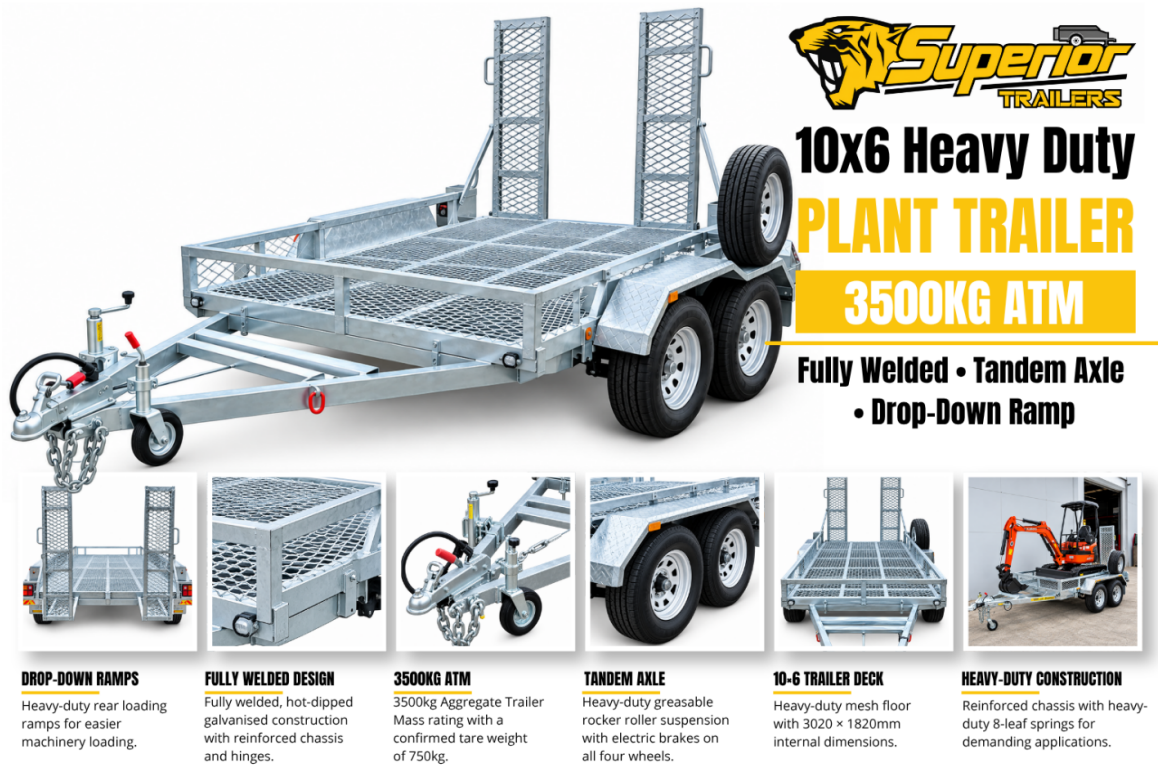

DROP-DOWN RAMPS
Heavy-duty rear loading ramps for easier machinery loading.

FULLY WELDED DESIGN
Fully welded, hot-dipped galvanised construction with reinforced chassis and hinges.

3500KG ATM
3500kg Aggregate Trailer Mass rating with a confirmed tare weight of 750kg.

TANDEM AXLE
Heavy-duty greasable rocker roller suspension with electric brakes on all four wheels.

10-6 TRAILER DECK
Heavy-duty mesh floor with 3020 × 1820mm internal dimensions.

HEAVY-DUTY CONSTRUCTION
Reinforced chassis with heavy-duty 8-leaf springs for demanding applications.

SPECIFICATION	DETAILS
ATM	3500 kg
Tare Weight	750 kg
Internal Size	3020 × 1820 mm
External Size	5380 × 2400 mm
Drawbar	1800 mm; 100 x 50 x 4 mm
Chassis	100 × 50 × 3.0 mm Tube
Finish	Hot Dipped Galvanised
Side	220 mm High Steel Frame
Floor	Heavy Duty Mesh Floor
Jockey Wheel	8″ Steel Rim Swing Up
Wheels and Tyres	Brand New 15″ 195/R15LT Light Truck; Sunraysia Style with 5 Studs Ford Hub Pattern
Axle	50x50mm Square Solid With 2 Tonne Bearings
Suspension	Heavy Duty Greasable Rocker Roller Suspension
Spring	Heavy Duty 8 Leaf Eye to Eye Spring
Coupling	50 mm ADR Approved Australian Standard with Grease Nipples
Connection Plug	Round or Flat 7 Pin Plug
Safety Chain	13 mm
Brake	Electric Brakes on All 4 Wheels with Breakaway Unit
Lights	LED Set

SP-10X6PT-V1-1026

Disclaimer: Specifications are indicative only and may vary between model years or individual units. For equipment hire, we will supply the same or an equivalent model that is fit for the disclosed purpose. For capital sales, exact specification sheets will be provided upon a formal quotation