

HIRE

SALES

SERVICE

LEASE

TRANSPORT

S85XC BOOM LIFT

85FT DIESEL BOOM LIFT TELESCOPIC

Models	S-85 XC	
Measurements	US	Metric
Working height max.(1)	91 ft	27.91 m
Platform height max.	85 ft	25.91 m
Horizontal reach max.	74 ft 6 in	22.71 m
Below ground reach	8 ft 8 in	2.64 m
Ⓐ Platform length (8 ft/6 ft)	3 ft/2 ft 6 in	0.91 m/0.76 m
Ⓑ Platform width (8 ft/6 ft)	8 ft/6 ft	2.44 m/1.83 m
Ⓒ Height - stowed	9 ft 2 in	2.80 m
Ⓓ Length - stowed	40 ft 7 in	12.37 m
Ⓔ Length - storage/transport (jib tucked under)	33 ft 8 in	10.25 m
Ⓘ Width	8 ft 2 in	2.49 m
Ⓛ Wheelbase	9 ft 4 in	2.85 m
Ⓜ Ground clearance - center	15.8 in	0.40 m
Ⓨ Height under counterweight	3 ft 9 in	1.14 m

Productivity

Lift capacity max. - unrestricted	660 lb	300 kg
Lift capacity max. - restricted	1,000 lb	454 kg
Number of Platform Occupants (restricted/unrestricted)	3/2	
Platform rotation	160°	
Jib length	5 ft	1.52 m
Vertical jib rotation (up/down)	133°	
Turntable rotation	360°	
Turntable tailswing	5 ft 3 in	1.60 m
Drive speed - stowed	3.0 mph	4.8 km/h
Drive speed - raised	0.5 mph	0.2 m/s
Gradeability - stowed ²	45 %	
Tilt sensor activation (front to back/side to side)	7° / 5°	
Turning radius - inside/outside	12 ft/21 ft 6 in	3.66 m/6.55 m
Tires	18-625	

Power



Power	Diesel	
Hydraulic tank capacity	40 gal	150 L
Fuel tank capacity	35 gal	132 L

Weight(3) and Floor Loading⁴

Weight	39,500 lb	17,917 kg
Tire contact pressure	130 psi	896 kPa
Occupied floor pressure	395 psi	18.9 kPa

Sound and Vibration Levels

Sound Pressure level (ground workstation)	85 dBA
Sound Pressure level (platform workstation)	78 dBA
Vibrations	< 2.5 m/s ²

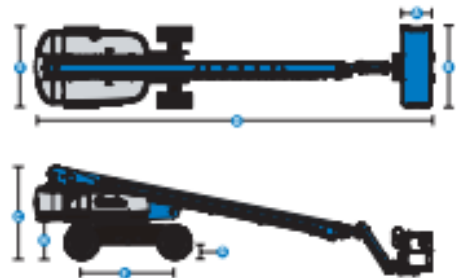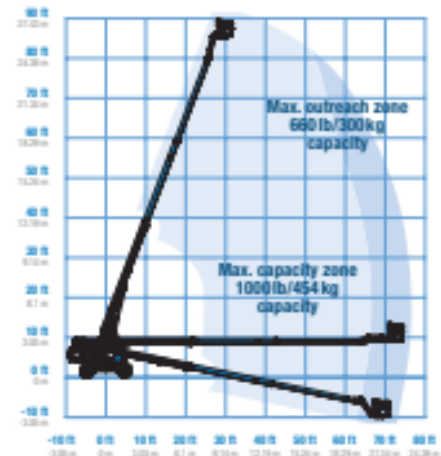

WA

NT

QLD

NSW

VIC

SA