
SPT020-7X4-QLD TRAILER

2T PLANT TRAILER

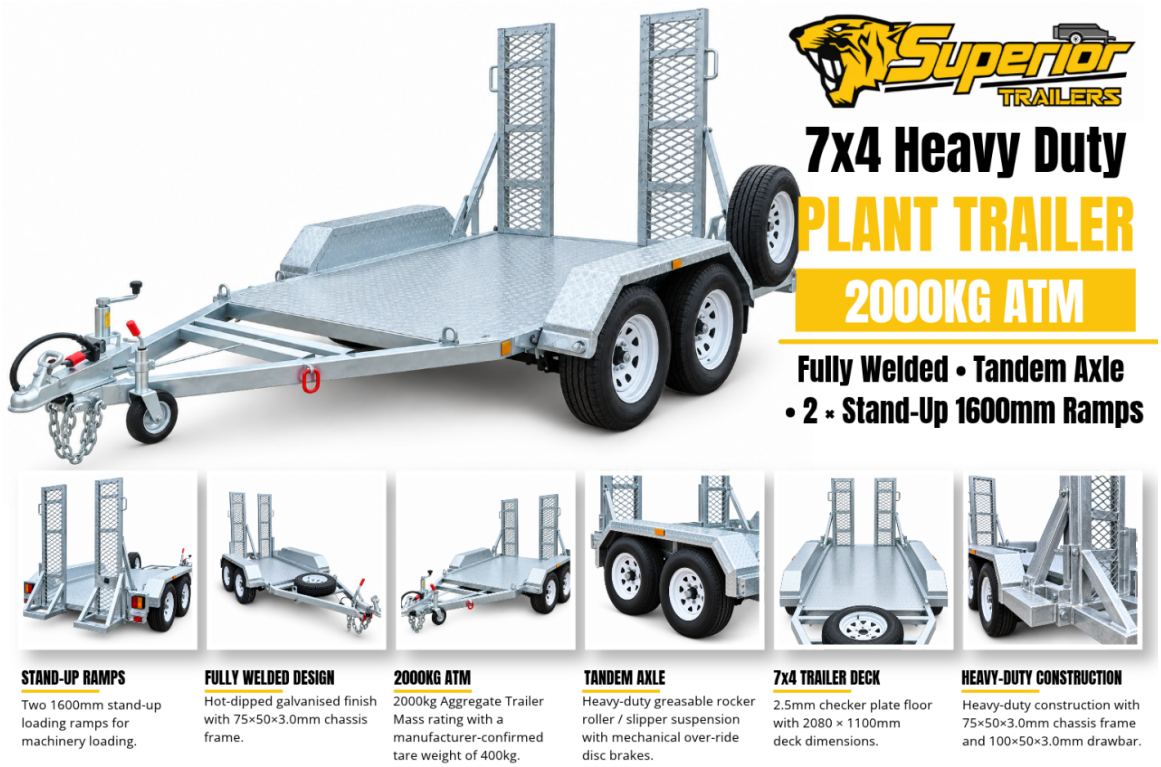

STAND-UP RAMPS
Two 1600mm stand-up loading ramps for machinery loading.

FULLY WELDED DESIGN
Hot-dipped galvanised finish with 75×50×3.0mm chassis frame.

2000KG ATM
2000kg Aggregate Trailer Mass rating with a manufacturer-confirmed tare weight of 400kg.

TANDEM AXLE
Heavy-duty greasable rocker roller / slipper suspension with mechanical over-ride disc brakes.

7x4 TRAILER DECK
2.5mm checker plate floor with 2080 × 1100mm deck dimensions.

HEAVY-DUTY CONSTRUCTION
Heavy-duty construction with 75×50×3.0mm chassis frame and 100×50×3.0mm drawbar.

SPECIFICATION	DETAILS
ATM	2000 kg
Tare Weight	400 kg
Internal Size	2080 x 1100 mm
External Size	3600 x 1600 x 2200 mm
Drawbar	100 x 50 x 3.0 mm Tube
Chassis	75 x 50 x 3.0 mm Tube
Finish	Hot Dipped Galvanised / Grey
Side	N/A
Floor	2.5 Checker Plate
Jockey Wheel	N/A
Wheels and Tyres	5 × Brand New 14" Light Truck Tyres (Includes Spare)
Axle	50 × 50 mm Square Solid
Suspension	Heavy Duty Greasable Rocker Roller / Slipper Suspension
Spring	N/A
Coupling	50 mm ADR Approved Australian Standard
Ramp Type	2 × Stand-Up Ramps, 1600 mm Long
Load Rating	2.0 Tonne GVM
Brake	Mechanical Over-ride / Mechanical Disc Brakes
Lights	LED Set

SP-7X4PT-V1-1026

Disclaimer: Specifications are indicative only and may vary between model years or individual units. For equipment hire, we will supply the same or an equivalent model that is fit for the disclosed purpose. For capital sales, exact specification sheets will be provided upon a formal quotation