

S3219 PLUS SCISSOR LIFT

19FT LITHIUM SCISSOR LIFT NARROW



DIMENSIONS	
Max. Working Height	25 ft (7.62m)
Max. Platform Height (A)	19 ft (5.79m)
Platform Size (Stowed)	31.5 in x 69 in (0.8m x 1.75m)
Platform Size (Extended)	31.5 in x 105 in (0.8m x 2.66m)
Deck Extension Length	36 in (0.91m)
Overall Length (C)	72 in (1.8m)
Overall Width (D)	32 in (0.81m)
Stowed Height (B)	78.75 in (2.0m)
Ground Clearance (Stowed)	2.63 in (0.06m)

PERFORMANCE	
Platform Capacity (SWL)	600 lbs (272.1kg)
Max. Wind Speed	28 mph (45kph)
Max. Drive Height	19 ft (5.79m)
Max. Drive Speed (Stowed)	2.0 mph (3.21kph)
Max. Drive Speed (Elevated)	0.4 mph (0.6kph)
Raise/Lower Time	35/20 sec
Gradeability	25%
Max. Operation Slope (side-to-side)	1.5 degrees
Max. Operation Slope (front-to-back)	4 degrees
Inside Turning Radius	5 in (0.12m)
Outside Turning Radius	58 in (1.47m)
Tires	12.7 in (0.32m)
Controls	Proportional
Drive System	Dual DC Motors
Parking Brake	2-wheel, spring applied

POWER	
Power Source	Two (2) 24V 60Ah Lithium Batteries
Charger	20A

WEIGHT	
Weight	2,900 lbs (1315.4kg)

TURNING RADIUS

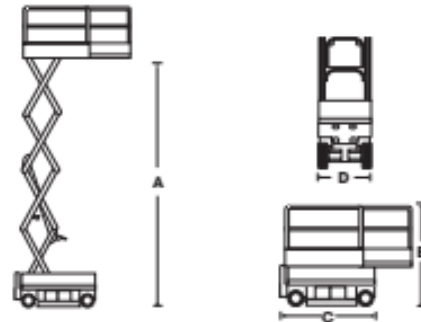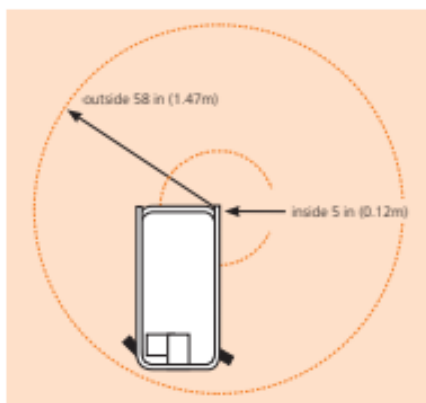

STANDARD FEATURES

- 100% Operation 2 person indoor, 1 person outdoor
- Lithium battery operated scissor lift
- No hydraulic hoses
- Fits standard doorway without folding rails
- Roll-out-deck with dual locks
- Non-marking tires—largest wheels/tires in class
- Heavy-duty spindles/steering
- Heavy-duty fixed control box
- Descent and all-motion alarms
- ANSI A92.20 compliant
- Proportional control, all functions
- Platform overload protection
- 110 V (15 amp) power to platform
- On-board diagnostics, hour meter, battery meter
- Automatic integrated battery charger
- Manual safety lowering system
- Flashing amber strobe
- Forklift pockets, crane lifting points
- Lanyard attachment points
- Swing-out service trays
- 2-year parts & labor warranty
- 5-year lithium battery & structural warranty