S06-ACE+ SCISSOR LIFT

19FT ELECTRIC SCISSOR LIFT NARROW

Dimension	Metric	British
Max. Working Height (A)	7.80m	25ft 7in
Max. Platform Height (B)	5.80m	19ft
Overall Length (C)	1.86m	6ft 1in
Overall Width (D)	0.76m	2ft 6in
Overall Height(Rails Up) (E)	2.15m	7ft 1in
Overall Height(Rails Down) (F)	1.83m	6ft
Platform Size(Length ×Width)	1.67m×0.74m	5ft 6in×2ft 5in
Platform Extension Size (G)	0.90m	2ft 11in
Ground Clearance(Stowed/Raised)	0.09m/0.016m	3in/1in
Wheelbase (H)	1.36m	4ft 5in
Turning Radius(Inside/Outside)	0m/1.64m	0in/5ft 5in
Tyres	φ323×100mm	φ323×100mm

Performance		
S.W.L	250kg	551lb
S.W.L on Extension	113kg	249lb
Max. Occupants (Indoor/Outdoor)	2/1	2/1
Gradeability	25%	25%
Travel Speed(Stowed)	5.5km/h	3.41mph
Travel Speed(Raised)	0.6km/h	0.37mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	22/22sec	22/22sec

Weight		
Overall Weight	1630kg	3594lblb

Power		
Hydraulic Tank	7L	1.7gal
Lithium Battery	28.8V/125Ah	28.8V/125Ah
Charger	28V/30A	28V/30A
Driving Motor	2×15VAC/0.5kW	2×15VAC/0.5kW
Lifting Motor	15VAC/3kW	15VAC/3kW

ELECTRIC

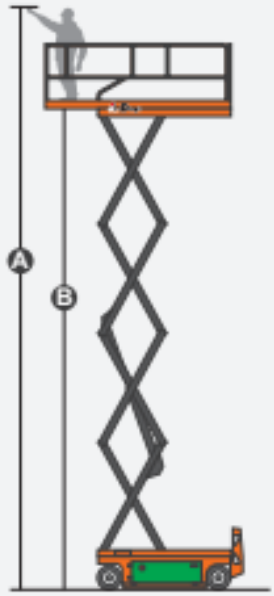





Disclaimer: Specifications are indicative only and may vary between model years or individual units. For equipment hire, we will supply the same or an equivalent model that is fit for the disclosed purpose.