# GP240K LIGHTING TOWER

## 245K LUMEN DIESEL LIGHTING TOWER TRAILER MOUNTED


Globe Power's GP240k Lighting Tower features 4 highly efficient LED heads and a safe 48V DC voltage for industry leading fuel savings. It is suitable for mining operations, construction projects, events, civil and road works. Fetaure a whole host of feature such as Bunding Alarm, level warning, jumpstart connector,

DURABLE & COST EFFECTIVE | BUILT FOR INDUSTRY | AUSTRALIAN DESIGNED

## PRODUCT SPECIFICATIONS

### GENERAL

| | |
|---|---|
| Model | GP240k |
| Lumen Output | 245,000 |
| Mast Height | 8 metres (max) |
| Mast Type | Hydraulic |
| Lights | 4 x 500W LED (Dimmable) individually adjustable |
| Function Control | Electric over hydraulic |

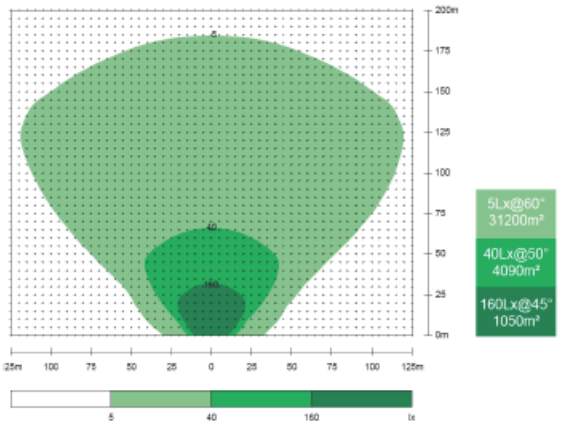




### UNIT INFORMATION

| | |
|---|---|
| Dimensions (Stowed) | 3925 x 2000 x 2750 (LxWxH) |
| Dimensions (Deployed) | 3925 x 2830 x 8000 (LxWxH) |
| Weight | 1,950kg |
| Trailer Wheels | 15" |
| Towing Speed (Max) | 80km/h |

### GENSET

| | |
|---|---|
| Generator | Kubota D1105 |
| Fuel Type | Diesel |
| Fuel Tank Capacity | 300L, 110% bunded |
| Fuel Consumption | 0.7L/hr |
| Running Time | 350 hours |
| Alternator | Meccalte PM5G-60/20 |
| Noise Level | 65dB at 7m |
| Control Panel | Smartgen lighting tower controller with 7 day timer, day/night sensor |

### OPERATIONAL

| | |
|---|---|
| Wind Rating | 120km/h |
| Mast Operation | Hydraulic lifting system |
| Mast Rotation | 180° Non-continuous |
| Tilt Telescope | Hydraulic |
| Stabilisers | 4 x Manually adjustable |

GP240k-LT-VT-0826



Disclaimer: Specifications are indicative only and may vary between model years or individual units. For equipment hire, we will supply the same or an equivalent model that is fit for the disclosed purpose.