
GP43K METRO LIGHTING TOWER

43K LUMEN SOLAR LIGHTING TOWER TRAILER MOUNTED



Globe Power's GP43K Metro Solar Lighting Tower has been built to suit various industries and is compliant with both metropolitan and mining specifications.

- 7 day timer
- Day/night modes
- Jack pads
- Audio safety messages
- Fire extinguisher
- Emergency stop
- Isolators
- Tilt sensor
- AC charger
- Wheel chocks
- Tie down points
- Lifting points
- Auto lowering mast

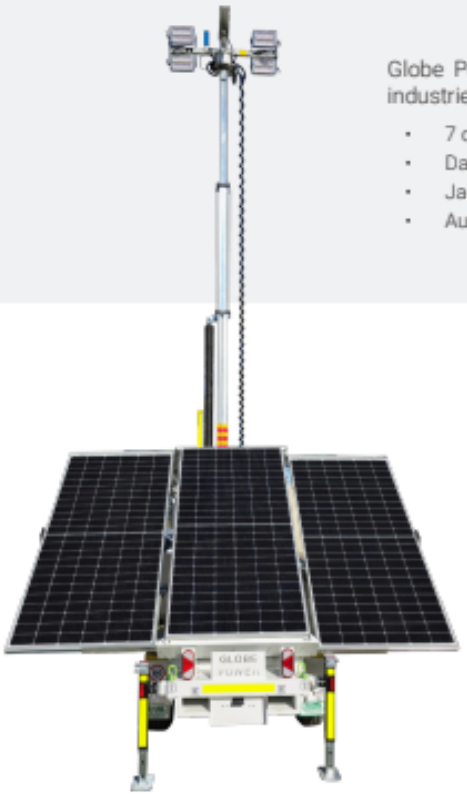

USER-FRIENDLY OPERATION INTERFACE

SOLAR & LITHIUM IRON PHOSPHATE BATTERY


PORTABLE & EASY TO TRANSPORT

AUSTRALIAN DESIGNED & ENGINEERED

PRODUCT SPECIFICATIONS

GENERAL

Model	GP43K Metro
Lumen Output	46,000
Mast Height	7.5 metres
Mast Type	Hydraulic/Cable
Lights	4 x 100w LED Modules (Dimmable)
Coverage	7,700m² at 5 lux

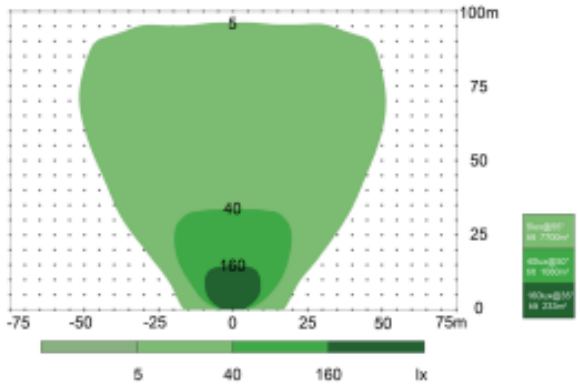

OPERATIONAL DATA

Wind Rating	100km/h
Working Temperature	0 to 50°C
Light Bar Tilt	0 to 90° Electric
Light Bar Rotation	355° Electric
Stabiliser Supports	4 x Manual Rotatable

BATTERY

Battery	10.24kWh Lithium LiFePO4
Run Time	42 hours
Solar	1.35kWp
Solar Tilt	45°
Solar Efficiency	1 hr of sun/4 hrs of light

UNIT INFORMATION

Dimensions (Towing)	3350x 1470 x 2985 (LxWxH)
Dimensions (Stowed)	2260 x 1470 x 2985 (LxWxH)
Dimensions (Deployed)	2260x 3360 x 7970 (LxWxH)
Weight	1,300kg
Security	Wheel/hitch locks, wheel clamp, folding drawbar, security wheel nuts

GP43K-Metro-V4-0226

Disclaimer: Specifications are indicative only and may vary between model years or individual units. For equipment hire, we will supply the same or an equivalent model that is fit for the disclosed purpose.