


35FT PETROL BOOM LIFT ARTICULATED

DIMENSIONS		MHP13/35
Max. height		12.6m
Max. platform height (A)		10.6m
Horizontal outreach		5.6m at 6m
Platform size		1.25m x 0.78m 1.07m
Outrigger footprint		3.7m x 3.9m
Overall width (outriggers extended)		3.95m
Overall width (outriggers retracted) (B)		1.58m
Overall length (C)		5.99m
Transport length (D)		2.05m

PERFORMANCE	
Platform capacity (with rotator)	227kg
Max. wind speed	12.5m/s
Levelling	auto
Turntable rotation	540° non-continuous
Tyres	185 R14
Brakes	Hydraulic disc
Max. axle capacity	1,750kg
Trailer tongue weight	65kg

POWER	
Power source	Honda petrol engine 5.5hp
Hydraulic system	Proportional electro/hydraulic

WEIGHT	
Gross weight	1,360kg

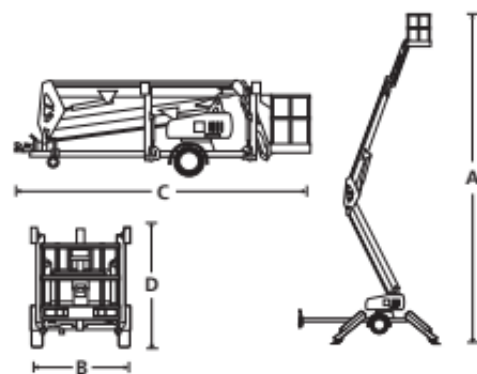

STANDARD FEATURES

- High strength steel boom and base construction
- Proportional speed control
- Heavy duty tow coupling
- Heavy duty jockey wheel
- Hydraulic disc brakes
- Reliable petrol engine
- Versatile jib boom (+70° to -70°)
- Articulating boom sections for 'up & over' reach
- 600V AC rated cable to platform
- Two man steel platform
- Automatic self-levelling stabilisers
- Outrigger/boom safety interlocks
- Lockable hinged covers
- Hour meter
- Lifting lugs
- Rotating basket mount
- Platform rotator
- Spare wheel

OPTIONS

- Flashing light
- 110/240V GFCI power to platform
- Diesel and bi/energy options

WORKING ENVELOPE

