S1012-HAE SCISSOR LIFT

32FT ELECTRIC SCISSOR LIFT WIDE DECK

Size	Metric	British
Max. Working Height (A)	12.00m	39ft 4in
Max. Platform Height (B)	10.00m	32ft 10in
Overall Length (C)	2.48m	8ft 2in
Overall Width (D)	1.15m	3ft 9in
Overall Height(Rails Up) (E)	2.49m	8ft 2in
Overall Height(Rails Down) (F)	1.96m	6ft 5in
Platform Size(Length×Width)	2.27m×1.12m	7ft 5in×3ft 8in
Platform Extension Size (G)	0.90m	2ft 11in
Ground Clearance(Stowed/Raised)	0.10m/0.019m	4in/1in
Wheelbase (H)	1.87m	6ft 2in
Turning Radius(Inside/Outside)	0m/2.20m	0in/7ft 3in
Tyres	φ381×127mm	φ381×127mm

Performance		
S.W.L	320kg	705lb
S.W.L On Extension	113kg	249lb
Max. Occupants	2	2
Gradeability	25%	25%
Travel Speed(Stowed)	3.5km/h	3.5km/h
Travel Speed(Raised)	0.8km/h	0.8km/h
Max. Working Slope	1.5°/3°	1.5°/3°
Up/Down Speed	55/49sec	55/49sec

Weight		
Overall Weight(Lead-acid Battery)	3050kg	6724lb
Overall Weight(Lithium Battery)	2990kg	6591lb

Power		
Hydraulic Tank	20L	20L
Battery	4×6V/200Ah	4×6V/200Ah
Charger	24V/30A	24V/30A
Lifting Motor	24VAC/3.5kW	24VAC/3.5kW

* The platform height plus 2m (7ft in British standard) is the working height.
Standards Compliance

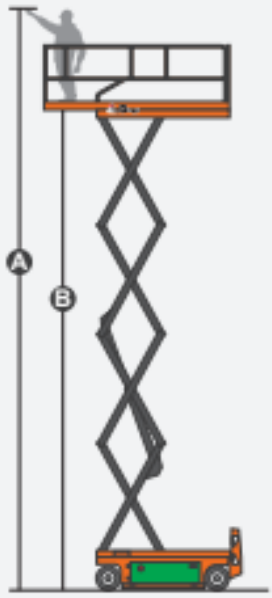





Disclaimer: Specifications are indicative only and may vary between model years or individual units. For equipment hire, we will supply the same or an equivalent model that is fit for the disclosed purpose.