GP65K URBAN LIGHTING TOWER

65K LUMEN SOLAR LIGHTING TOWER TRAILER MOUNTED

Globe Power's GP65K Urban Solar Lighting Tower has been built to suit various industries and is compliant with both metropolitan and mining specifications.

- 7 day timer
- Day/night modes
- Jack pads
- Fire extinguisher
- Emergency stop
- Isolators
- Tilt sensor
- AC charger
- Wheel chocks
- Tie down points
- Lifting points





USER-FRIENDLY OPERATION INTERFACE

SOLAR

PORTABLE & EASY TO TRANSPORT

AUSTRALIAN DESIGNED & ENGINEERED

PRODUCT SPECIFICATIONS

GENERAL

Model	GP65K Urban
Lumen Output	68,000
Mast Height	9 metres
Mast Type	Hydraulic/Cable
Lights	4 x 150w LED Modules (Dimmable)
Coverage	11,335m² at 5 lux

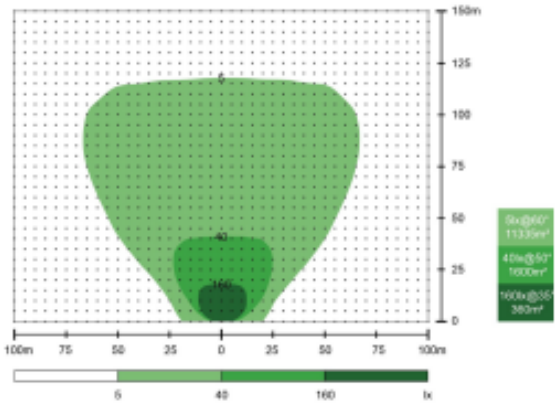

OPERATIONAL DATA

Wind Rating	100km/h
Working Temperature	0 to 50°C
Light Bar Tilt	0 to 90° Electric
Light Bar Rotation	355° Electric
Stabiliser Supports	4 x Manual

BATTERY

Battery	14.4kWh Deep Cycle Gel
Run Time	48 hours
Solar	1.8kWp
Solar Tilt	30°
Solar Efficiency	1 hr of sun/3.5 hrs of light

UNIT INFORMATION

Dimensions (Transport)	3660 x 2240 x 2930 (LxWxH)
Dimensions (Deployed)	3600 x 4370 x 9700 (LxWxH)
Weight	1,900kg
Security	Wheel/hitch locks, wheel clamp, security wheel nuts

GP65K-Urban-V4-0226

Disclaimer: Specifications are indicative only and may vary between model years or individual units. For equipment hire, we will supply the same or an equivalent model that is fit for the disclosed purpose.